

**SIDE-MOUNT WORKTOP  
REFRIGERATORS**

VWR119HC

- 3 Year Parts & Labor Warranty Plus an Additional  
2 Year Compressor Warranty

- Exclusive 2 Year Warranty on Santoprene Door Gaskets

# VICTORY

---

## ULTRASPEC®

### STANDARD FEATURES

- Full Electronic Control
- High Performance, Balanced, Bottom-Mounted Refrigeration
- Anti-Corrosion Coated Evaporator Coil
- Stainless Steel Exterior / Aluminum Interior
- Cabinet back and bottom galvanized steel
- Stainless steel 2 1/2" thick worktop with 4" high foamed-in-place backsplash
- Environmentally Safe R290 Refrigerant For Refrigerators
- 2" Thick Foamed-in-Place Polyurethane Insulation
- Self-Closing Door(s) with 120° Hold Open Feature
- Santoprene Door Gaskets with Exclusive 2 Year Warranty
- 2 Epoxy Coated Shelves
- 6" Casters Standard, 2 with Brakes
- Cartridge Style Hinges
- 10' Cord and Plug (see electrical data for details)



**VWR119HC**

### OPTIONS & ACCESSORIES

- Change Door Swing
- Extra Shelves
- 3" Overall Height Casters (Set of 4)
- 220/50Hz, 220/60 Hz Voltages
- Secure-Temp 1.0™ Technology



3779 Champion Blvd—Winston-Salem, NC 27105

PH: (888) 845-9800 - Fax: (800) 253-5168

sales@victoryrefrigeration.com www.victoryrefrigeration.com

## CABINET CONSTRUCTION

Heavy duty construction includes exterior stainless steel on front, sides, door(s) and grille. Cabinet back and bottom are galvanized steel. Interior liner is made of corrosion resistant aluminum. Interior thermometer is standard.

Doors are mounted to face of cabinet on cartridge-style hinges permitting them to self-close under their own weight. Hinges also allow doors to stay open 120° and permit easy door removal for service and cleaning if required. A plug-in type vinyl magnetic gasket is attached to each door for positive seal.

Cabinet insulation is CFC and HCFC-free foamed-in-place polyurethane of two-inch minimum thickness. Units are supplied with 6" high casters. Front casters have wheel locking mechanism.

## ELECTRONIC CONTROL

## REFRIGERATION SYSTEM

Robust and balanced refrigeration system ensures that food stays fresh for a longer period of time. Optimum air flow inside cabinets helps in keeping uniform temperature within the cabinet. Refrigeration system uses environment friendly R290 refrigerant which is CFC and HCFC-free. Design utilizes automatic condensate removal process.

Refrigerators operate at 36° - 38°F

CHARACTERISTICS	VWR119
<b>DIMENSIONAL DATA</b>	
Width, Overall (in.)	119"
Depth, Overall (inc. Handles)	33"
Depth, Door(s) Open 90°	55 7/8"
Height Overall (in.)	39 1/2"
Capacity Net (cu ft)	40.1
No. Full Doors	4
No. of Shelves	8


ELECTRICAL DATA	
Cabinet Voltage	115/60/1
Total Amperes	4.9

**NOTE:** Plug style, voltage and full load amps may vary depending on certain options selected such as optional voltages and compressor upgrades.

REFRIGERATION DATA	
Condensing Unit Size	1/3 HP
Refrigerant	R-290

CRATED WEIGHT ONE SECTION	675LBS
---------------------------	--------

\* Remote units use R-404A refrigerant standard and come with 6" legs

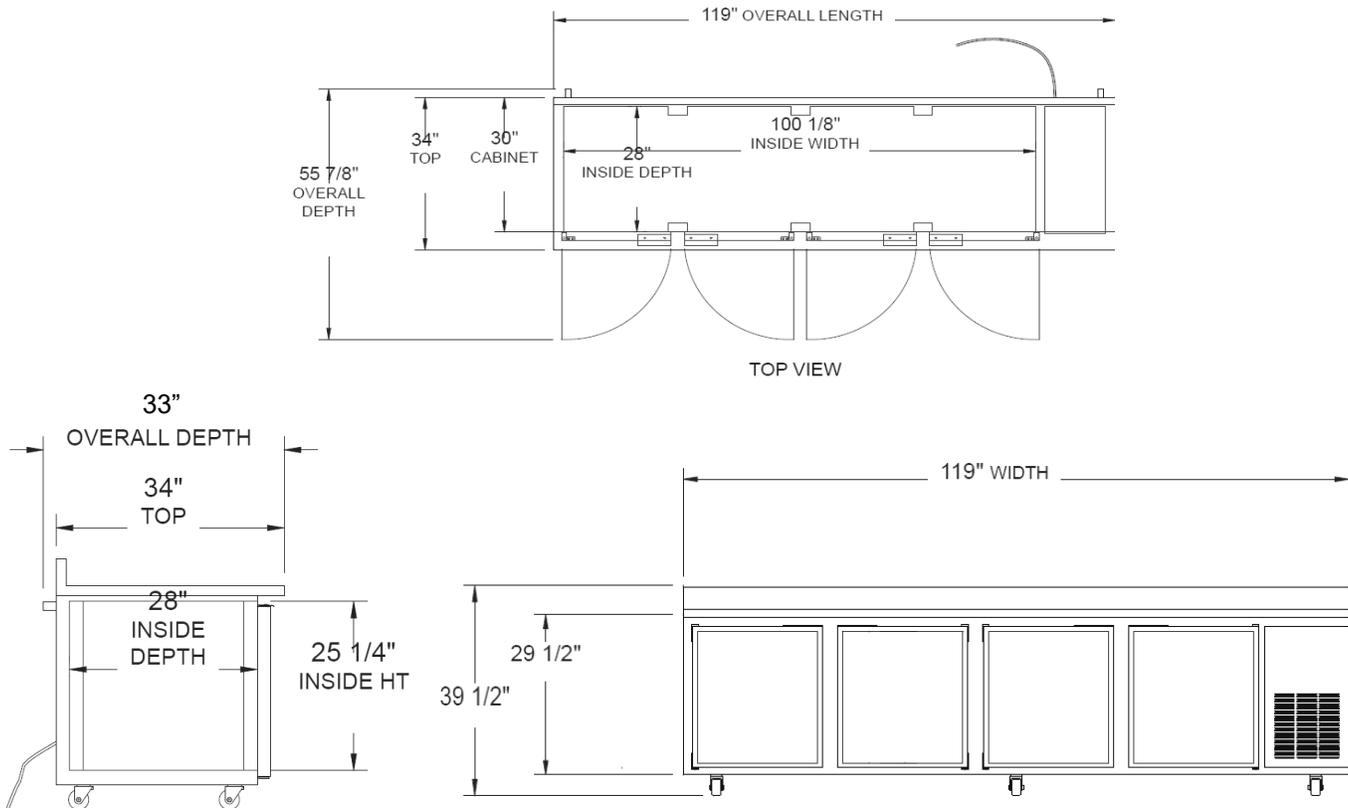

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)